



RX10 low value precision wire-wound resistors

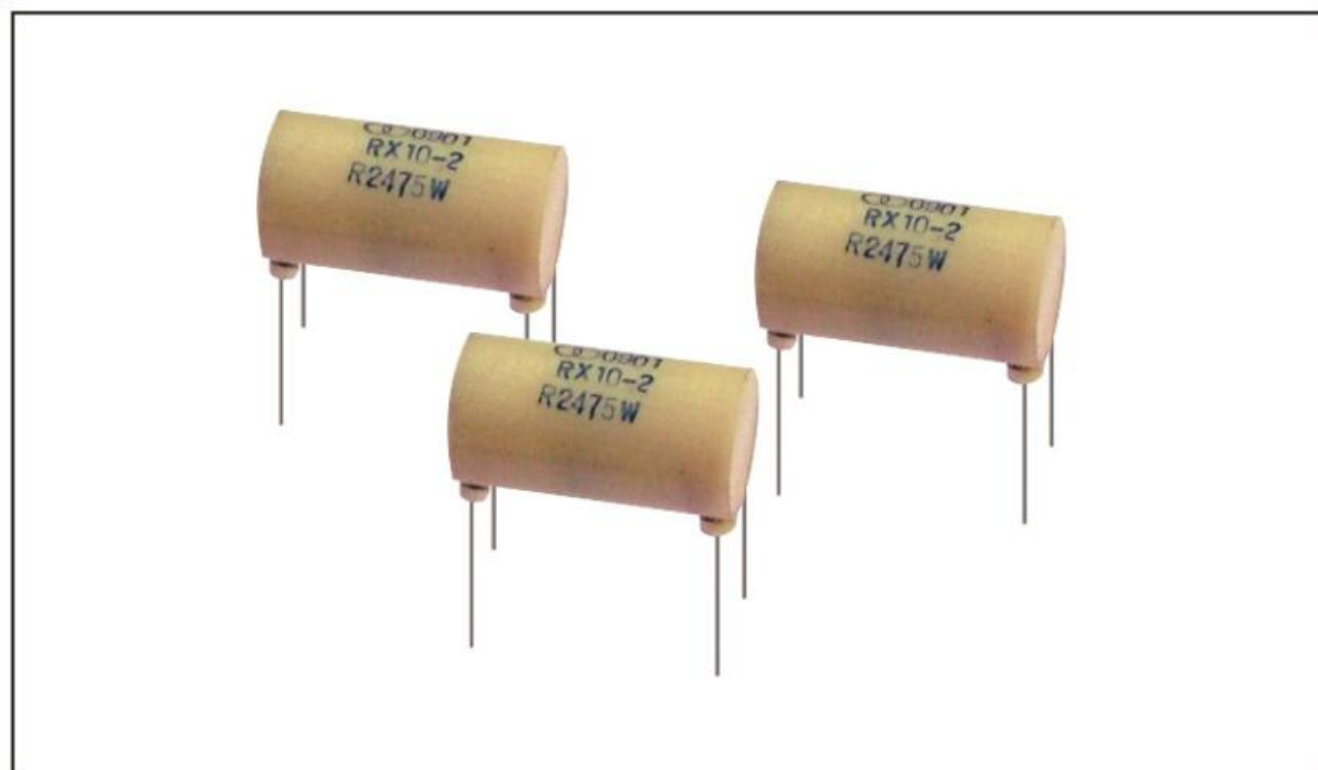

Features

- Low resistance value, low TCR, high precision
- Excellent properties of insulation and humidity-proof

Derating Curve

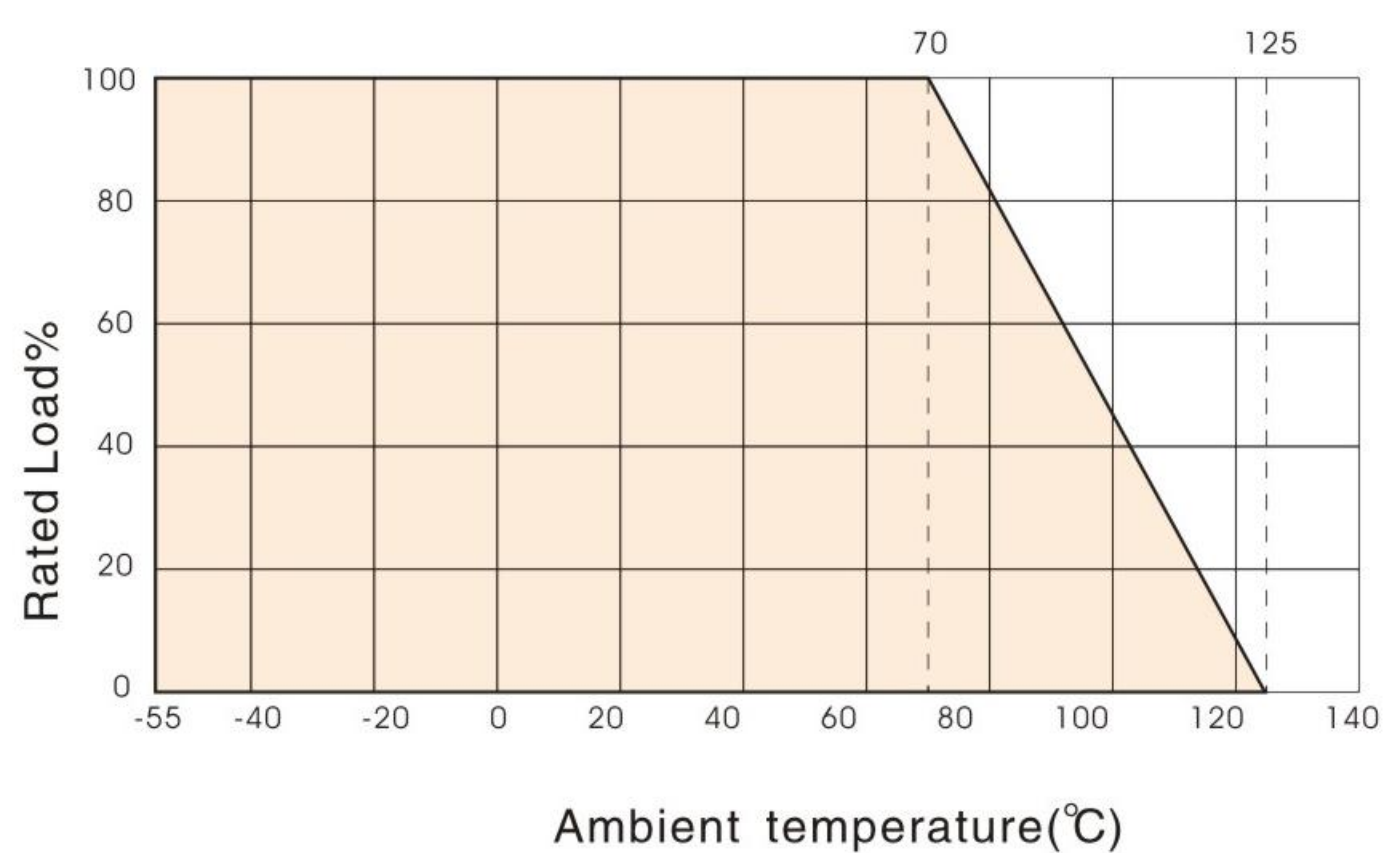

Applications

- Used in meters and instruments
- Other electrical equipments

Reference Standards

GB/T5729-2003
GB5734-85

Technical Specifications

Type	Power (W)	Resistance Range (Ω)	Tolerance (%)	T.C.R (10 ⁻⁶ /K)	Size(mm)				Limiting Voltage (DC or AC R.M.S)	Insulation Voltage (DC or AC Peak)
					Body		Terminal			
					Dmax±0.3	Lmax±0.3	d	l		
RX10	0.5	0.01~1.0	±0.05(W) ±0.1(B) ±0.25(C) ±0.5(D) ±1(F)	±10	12	25	0.8	25±3	500	700
	1	0.01~1.0	±20	15	27.5	1000			1400	
	2	0.01~1.0	±25	18	38	1000			1400	

How To Order

Example

RX10	0.5W	1Ω	±0.05%	±25(10 ⁻⁶ /K)	box
Type	Power	Nominal Value	Tolerance	TCR	Packaging
RX10	0.5W 1W 2W	1Ω	±0.05% ±0.1% ±0.2% ±0.5% ±1.0%	±25(10 ⁻⁶ /K)	box